




## ***AT SERIES Pressure Check Specs***

### **WARNING!**

*Observe safety precautions during hydraulic pressure check procedures. All personnel must stand clear of the vehicle. Be sure that gauges (vacuum, pressure, tachometer) have extended lines so that they can be read from inside the vehicle.*

### **Main Pressure @ 1200rpm, brakes applied.**


- Neutral/Park 135-155psi
- Forward 135-155psi

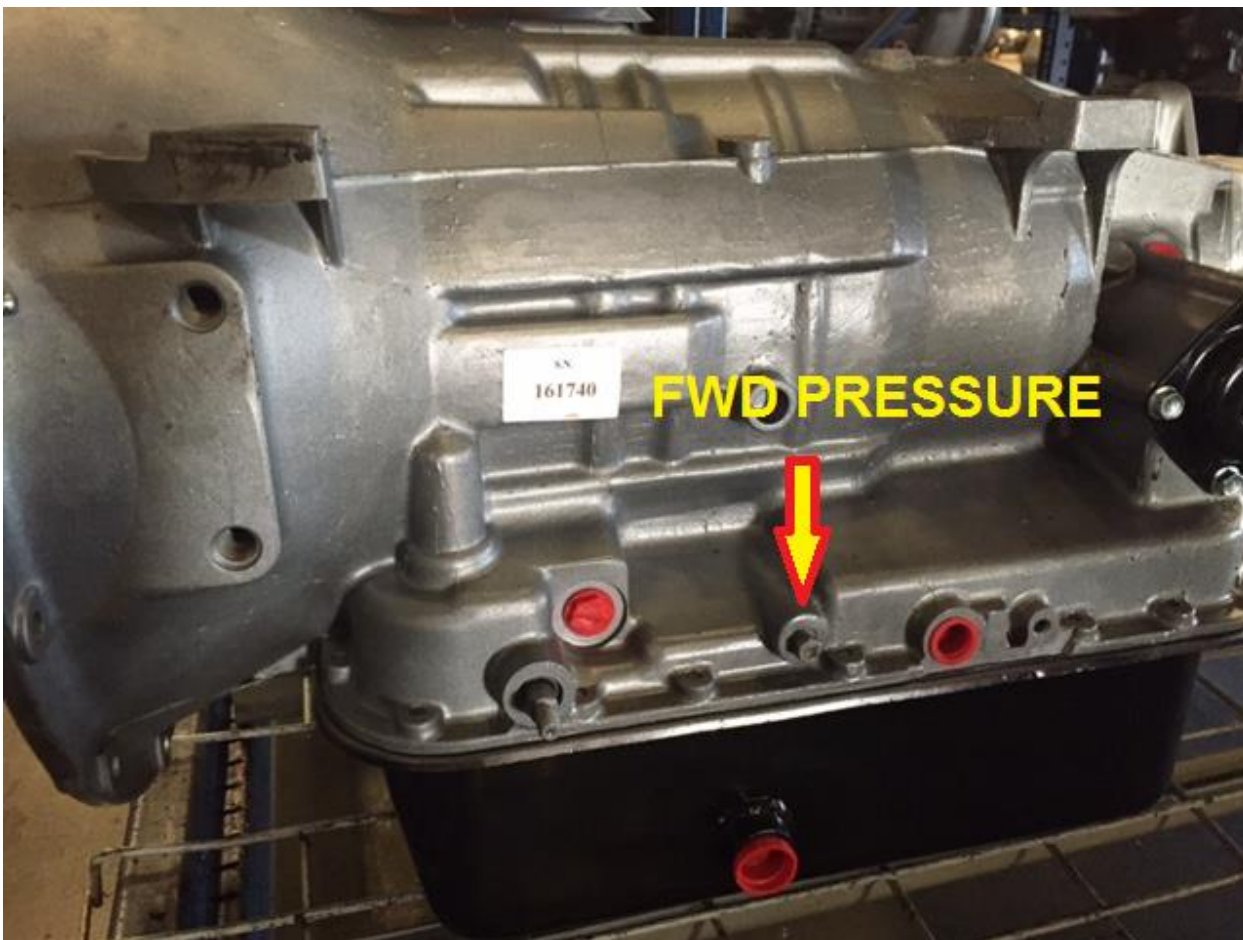



## Reverse Pressure @2500rpm, brakes applied.

- Reverse 230-275psi

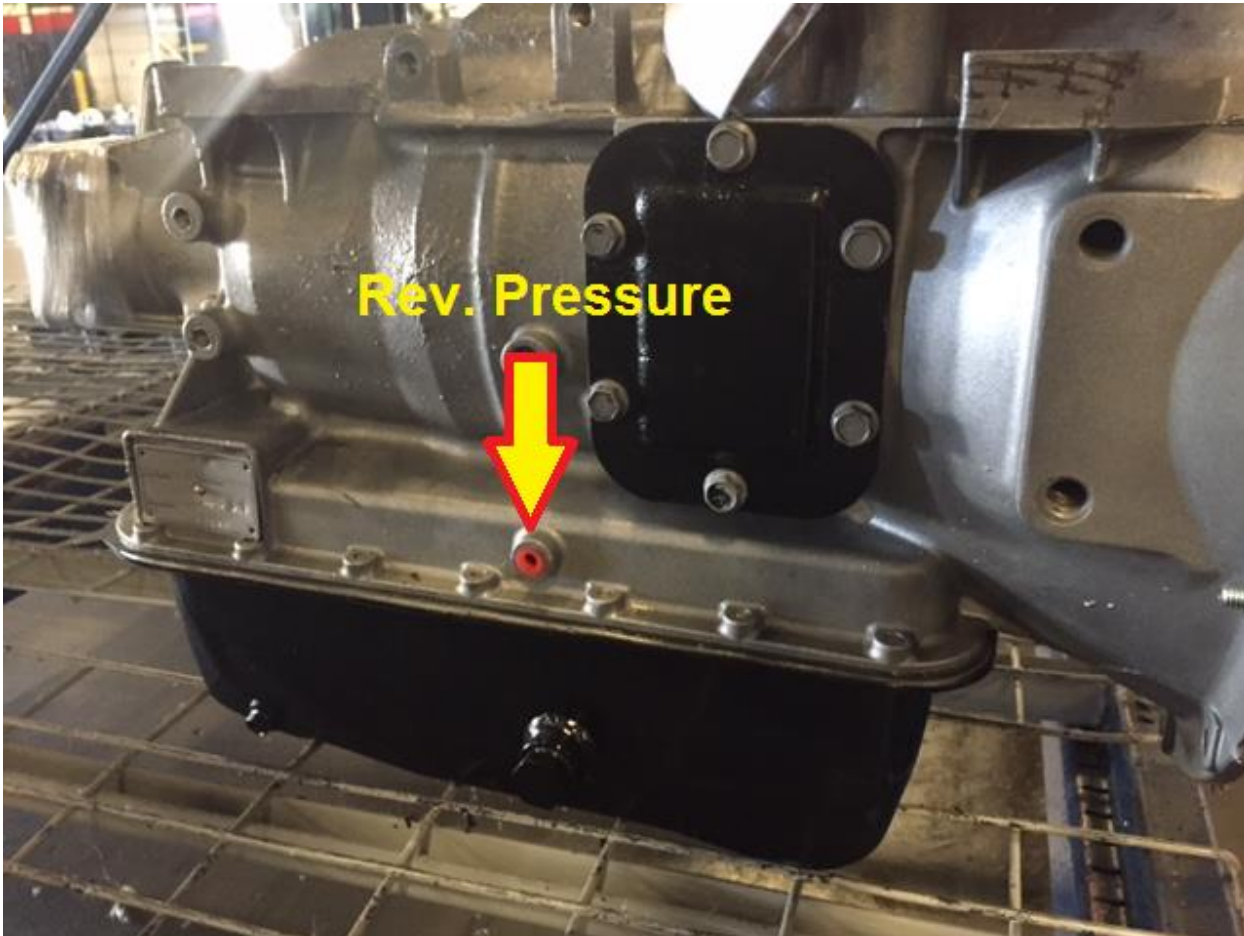

*Checks should be performed at operating temp (160-200F @ Pan)*